

DalChoc

‘Soft yet durable eco-flooring made from recycled rubber.’



Available in 8 colourways and 6 densities, DalChoc offers an exceptional level of sound and impact absorption.

Colour availability

DalChoc is available in a base colour of recycled black tyre rubber with a choice of 7 vibrant EDPM terrazzo granules or a solid black finish.

Finish

DalChoc has a fine granular surface finish with an open structure. PU sealer required after installation.

Roll Size/Thickness

1500mm wide, all thicknesses.

Roll length varies by product thickness as follows:

Thickness	Roll length
4mm	30 metres
5mm	24 metres
6mm	20 metres
8mm	15 metres
10mm	12 metres
12mm	10 metres

Available in full rolls only.*

*Dalsouple reserves the right to ship shorter rolls to make up the full amount of the order. These shorter rolls will not exceed 10% of the total order.

Thickness

Standard 15% density available in 4, 5, 6, 8, 10, 12mm thickness.

Non standard densities available in 6mm (other thicknesses available on special order).

Performance

Tough
Noise absorbent
Impact absorbent
Anti-slip
Cigarette burn resistant
Easy to maintain
Suitable for use with underfloor heating
Comfortable to walk on
Skate resistant at a minimum 10mm thickness

Uses

Indoor surfaces and floors, including sports environments.

Slip resistance

Dalsouple rubber is designed to offer a good degree of slip resistance underfoot in dry conditions. However, it can still be slippery when wet. To minimise the risk of slippage, it is important to use effective entrance matting around all external entrances, and to use signs when cleaning takes place.

Special colours

Please note that DalChoc is available only in the colourways shown. Special colours are available subject to a minimum quantity of approx 450m²/6mm thickness.

For **Colour reproduction, Technical, Standards & certification,** and **Samples & information** please see insert back.

Colour reproduction

The colour samples are designed to give you an accurate representation of colour. However, you should note that due to the manufacturing process, colours may vary slightly from batch to batch. Also, as with any type of colour sampling, the colours may be subject to slight variation over time. The folder should be renewed periodically to maintain accurate colour communication.

Splitting lines

Splitting lines are a natural feature of this product and will always occur.

Technical

For information on installation, maintenance, adhesives and accessories please visit dalsouple.com or email specs@dalsouple.com

Standards & certification

DalChoc
Fire resistance: E_{fl}
Footfall sound reduction:
17 dB (for 6mm)
18 dB (for 8mm)
Colour Permanence: 2-3
Chair-castor compatibility:
suitable for permanent use

Samples & information
www.dalsouple.com


Questions?

email info@dalsouple.com
tel +44 (0) 1278 727777
fax +44 (0) 1278 727788

DalChoc is available in 8 colourways.




Pépité d'Or




Tourbière



Étoile




Braise




Ecchymose



Houille



Carotte




Ombre


The above **DalChoc** samples are shown in 15% colour density. For a lower or higher density choose from the density grades opposite:



5% density




10% density

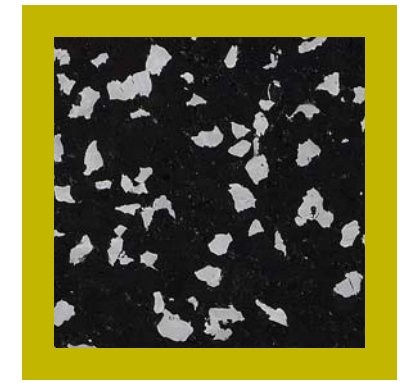


15% density



20% density



30% density

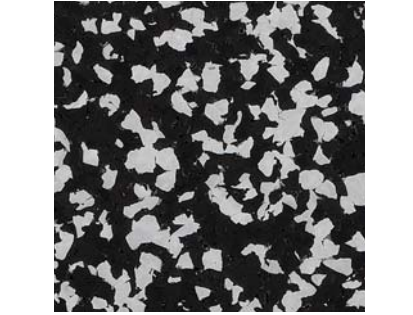

50% density

DalChoc products are available in the colours shown. Special colours are available subject to a minimum quantity of approx 450m²/6mm thickness.